




BUILT ENVIRONMENT

MaxiCharger

DC DH 80 - 240kW

Product Overview

- Height: **2150mm**
- Width: **782mm**
- Depth: **600mm**

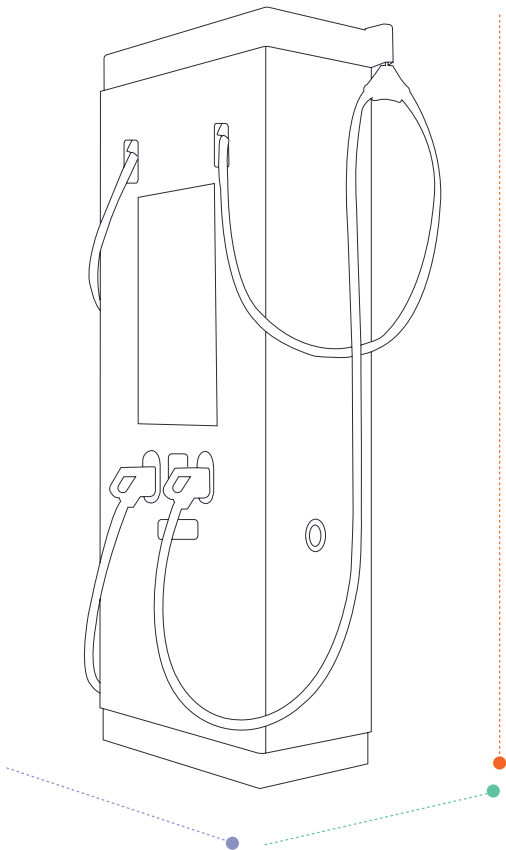

Product name	Product code	Power output	AC Input voltage	Dimensions HxWxD
MaxiCharger DC DH80	MDH80-BE	80kW	Three phase 400V AC±10%	2150 x 782 x 480 mm
MaxiCharger DC DH120	MDH120-BE	120kW	Three phase 400V AC±10%	2150 x 782 x 480 mm
MaxiCharger DC DH160	MDH160-BE	160kW	Three phase 400V AC±10%	2150 x 782 x 480 mm
MaxiCharger DC DH200	MDH200-BE	200kW	Three phase 400V AC±10%	2150 x 782 x 480 mm
MaxiCharger DC DH240	MDH240-BE	240kW	Three phase 400V AC±10%	2150 x 782 x 480 mm

Technical Data

	DC MDH 80-BE / MDH 240-BE
Charging mode	Mode 4 CCS2
Output voltage	150-1000V
Max output current	Uncooled Cable: 380A (Max. 500A)
Number of outputs	2*CCS2
Peak efficiency	≥96%
Earthing system	3P+PE
User interface	27 inch LCD Touch Screen, Autel Charge app, Autel Charge cloud, 4G, Wi-Fi, Ethernet
Communication protocols	OCPP 1.6J (OCPP 2.0.1 optional)
User authentication	App, RFID card, credit card optional (back office subscription required)
IP & IK rating	IP54, IK10
Unit dimensions	2150 x 782 x 480 mm (H x W x D)
Operating temperature range	-35°C ~ +55°C
Safety standards	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht
Certification	CE; UKCA; TR25; ETSI EN 303645; TÜV, EMC Class A
Warranty	2 years
Connectivity	4G (requires SIM card) / Wi-Fi / Hardwired
Max cable termination size	240m

Parameter	Power Rating (kW)					
	Cabinet	80	120	160	200	240
Rated Input Current (A)		127	189	251	313	375



0330 058 7144

enquiries@sevadis.com

sevadis.com

Granville House, Unit E, The Heights Business Park,
Ibstone Rd, Stokenchurch High Wycombe, HP14 3BG

Built Environment Resources sevadis.com/built-environment