



CHN-730-NC-DG

Monocrystalline Module Bifacial Dual Glass

715W-730W

730W

Maximum Power
Output

23.50%

Maximum Module
Efficiency

0~+3%

Power Output
Guarantee



TOPCON



18BB(210mm)

● FIRE CLASS A

Fire protection through double glazing according to safety requirements

● REINSURANCE COVERAGE

Taoistic is reinsured for 30 years of performance guarantee



High quality silicon wafers guarantee high power module output and excellent cost-effectiveness, making it an ideal choice for large power plants



Selected packaging materials and strict process plans to ensure component PID resistance



Lower oxygen and carbon content leads to lower LID



Adapt to harsh outdoor environments through weather resistance tests such as sand and dust, salt spray, and ammonia gas



The design of series and parallel connection reduces the series resistance R_s of components, reduces internal electrical performance losses, and improves the power generation capacity of the system end



Our company has concluded a reinsurance agreement with Ariel Re - Lloyd's syndicate 1910. Please see <http://verification.arielre-cleanenergy.com>

Deliver Reliable Performance Over Time


- manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and ISO45001:2008
- Tested for harsh environments (salt mist, ammonia corrosion, sand blowing test, and PID test: IEC 61701, IEC 62716)
- Long term reliability tests
- 2x100% EL inspection ensuring defect-free modules

WARRANTY

12 years product warranty

30 years performance warranty

Linear Performance Warranty

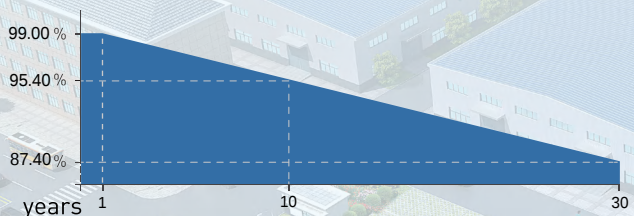

12 Years Product Warranty 30 Years Linear Power Warranty

* Please refer to standard warranty for details

Product Certification



TAOISTIC SOLAR TECHNOLOGY(ChangZhou)CO.,LTD.

Innovating Light Energy
Technology to Build a Green Life

E-MAIL: Info@taoistic-solar.com

WEB.: www.taoistic-solar.com

Specifications are subject to change without prior notice

CHN-730-NC-DG-18BB-L-2023-V23.0

@Copyright 2023 TAOISTIC-SOLAR

CHN-730-NC-DG

Monocrystalline Module

Bifacial Dual Glass

715W-730W

Electrical Specification { STC* }

Maximum Power	Pmax[W]	715	720	725	730
Maximum Power Voltage	Vmp[V]	40.60	40.80	41.00	41.20
Maximum Power Current	Imp[A]	17.62	17.65	17.69	17.72
Open Circuit Voltage	Voc[V]	48.50	48.70	48.90	49.10
Short Circuit Current	Isc[A]	18.64	18.69	19.74	19.79
Module Efficiency	{%}	23.02	23.18	23.34	23.50
Power Output Tolerance	[W]	0~+3%			

* Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

Electrical Specification { MNOT* }

Maximum Power	Pmax[W]	715	720	725	730
Maximum Power Voltage	Vmp[V]	34.83	34.99	35.12	35.26
Maximum Power Current	Imp[A]	15.75	15.78	15.80	15.83
Open Circuit Voltage	Voc[V]	43.33	43.46	43.61	43.73
Short Circuit Current	Isc[A]	16.31	16.35	16.40	16.44

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Data

Number of Cells	132pieces [2x66]
Dimensions of Module L*W*H (mm)	2384×1303×30mm
Weight (kg)	Approx. 38.4 kg
Front Side Glass	2.0 mm AR Tempered Glass
Back Side Glass	2.0 mm Tempered Glass
Frame	Anodized Aluminum Alloy Silver Frame*
J-Box	Protection level IP68
Cable	4.0mm ² , 300mm/1100mm
Number of diodes	3
Wind/Snow Load	2400 Pa/5400 pa*
Connector	MC4 or Compatible

* For more details please check the installation manual

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	43±2°C
Temperature Coefficient of Isc	+0.045%/°C
Temperature Coefficient of Voc	-0.230%/°C
Temperature Coefficient of P _{MAX}	-0.026%/°C

Temperature Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC-[H]
Max Series Fuse Rating	35A

Packaging Configuration


Module per box	37 pieces
Module per 40 container	666 pieces

* Due to different specifications, the specific loading quantity is subject to the actual arrival of goods

Optional

Connector	Original MC
Cable length	1200mm
Frame	Black
Glass	Black


Module Dimension

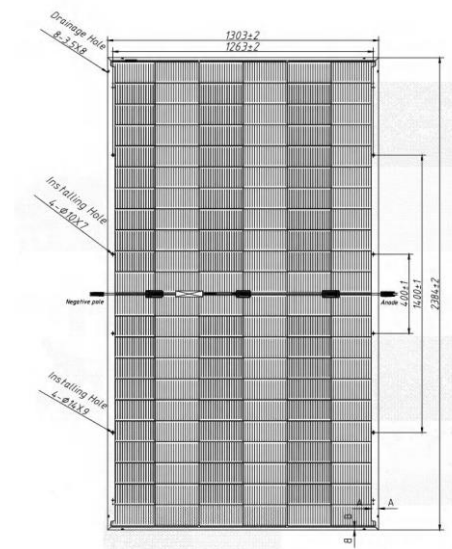


SPECIFICATIONS (BNPI)

Maximum Power	Pmax[W]	787	792	798	803
Maximum Power Voltage	Vmp[V]	40.60	40.80	41.00	41.20
Maximum Power Current	Imp[A]	19.38	19.42	19.46	19.49
Open Circuit Voltage	Voc[V]	48.65	48.85	49.05	49.25
Short Circuit Current	Isc[A]	20.50	20.56	20.61	20.67

Back View

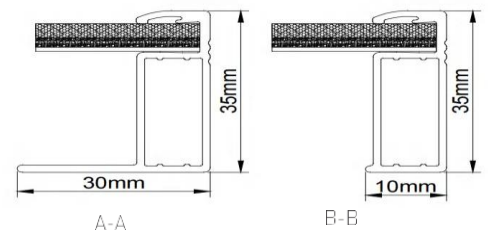

I-V Curve at Different Temperature (730W)

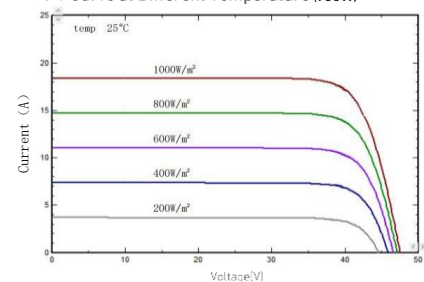

I-V/P-V Curve at Different Irradiation (730W)

